

COMPACT EARTH + UTILITY EQUIPMENT

Compact Utility Loaders, Skid Steers, Compact Trackloaders and Compact Excavators



COMPACT UTILITY LOADERS



TORO/TX1000

- Fits through standard 42" gate
- Vertical lift is ideal for clearing high walls
- More stable than wheels in soft soil/sand applications



TORO/AUGER



TORO/FORK



TORO/HYDRAULIC HAMMER

MAKE	MODEL	FUEL	HP	OPERATING CAPACITY	FUEL CAPACITY	DUMP HEIGHT	WEIGHT	HYD PRESSURE / FLOW	GROUND PRESSURE	DIMENSIONS (LWH)	CAT-CLASS
TORO	TX525	DSL	23 hp	553	6 Gallons	66"	1,904 lbs	3,000 PSI / 15.2 gpm	5.4 PSI	92" x 33.7" x 46.1"	200-1030
TORO	TX1000	DSL	24.9 hp	1075	6 Gallons	81"	2,610 lbs	3,000 PSI / 13.8 gpm	5.0 PSI	100.7" x 41" x 53.2"	200-1040
TORO	TX 427	Gas	25 HP	535	6 Gallons	46"	1882 lbs	3,000 PSI/16.9 gpm	5.0 Psi	92" x 41" x 46.1"	200-1020

SKIDSTEERS



BOBCAT/S450

- Tight turning radius for small areas
- Tier4 Final with no DPF or DEF aftertreatment
- Protects ground better than track machines



Available with High Flow Hydraulics

BOBCAT/S570

- Vertical lift is ideal for clearing high walls
- Tier4 Final with no DPF or DEF after treatment
- Protects ground better than track machines



Available with High Flow Hydraulics

BOBCAT/S650

- Increased lift capacity at forward full height
- Tier4 Final with no DPF or DEF aftertreatment
- Protects ground better than track machines

MAKE	MODEL	RATED OPERATING CAPACITY	ENGINE	DUMP HEIGHT	HYDRAULIC FLOW	DIMENSIONS (LWH)	OPERATING WEIGHT	CAT-CLASS
Bobcat	S70	700 lbs	23 hp Diesel	94.5"	Standard 9.8 gpm	75.6" x 36" x 71.4"	2,795 lbs	200-1310
Bobcat	S450	1,300 lbs	49 hp, Diesel	109.5"	Standard 16.7 gpm	124.9" x 62" x 77.8"	5,027 lbs	200-1330
Bobcat	S570	1,950 lbs	61 hp Diesel	119"	Standard 17.1 gpm	133" x 68" x 77.8"	6,480 lbs	200-1350
Bobcat	S570	1,950 lbs	61 hp Diesel	119"	High 26.7 gpm	133" x 68" x 77.8"	6,480 lbs	200-1352
Kubota	SSV65PF	1,950 lbs	64 hp Diesel	121.5"	High 28.0 gpm	135.4" x 69" x 79.9"	6,790 lbs	200-1352
Bobcat	S650	2,690 lbs	74 hp Diesel	124"	Standard 23 gpm	136" x 74" x 81.3"	8,061 lbs	200-1370
Bobcat	S650	2,690 lbs	74 hp Diesel	124"	High 30.5 gpm	136" x 74" x 81.3"	8,061 lbs	200-1373
Kubota	SSV75PHFC	2,690 lbs	74 hp, Diesel	128.3"	High 30.4 gpm	144.1" x 74" x 81.3"	8,157 lbs	200-1373

COMPACT TRACKLOADERS



BOBCAT/T450

- Automatic ride control reduces material spillage
- Radius lift path for mid-range heights



Available with High Flow Hydraulics

BOBCAT/T590

- Control loader and attachments with selectable Joystick
- Vertical lift path for working in tight spaces



BOBCAT/T650

- Heavy duty tracks for maximum uptime
- Tier4 Final with no DPF and DEF aftertreatment



BOBCAT/T740

- Incredible traction for soft soil applications
- Pins on both sides for less wear and tear



Available with High Flow Hydraulics

KUBOTA/SVL75

- Push, lift, and break with multi-task load sensing system
- Pre-set maximum hydraulic flow to prevent damage



KUBOTA/SVL95-2S

- Torque management system prevents engine stalling
- 2-speed travel and one-way self-level

MAKE	MODEL	RATED OPERATING CAPACITY	ENGINE	DUMP HEIGHT	HYDRAULIC FLOW	DIMENSIONS (LWH)	OPERATING WEIGHT	WEIGHT	CAT-CLASS
Bobcat	T450	1,400 lbs	61 hp, Diesel	109.5"	Standard 16.7 gpm	126.6" x 56" x 77.8"	6,148 lbs	6,148 lbs	200-1430
Bobcat	T590	2,100 lbs	66 hp, Diesel	119"	Standard 17 gpm	133" x 68" x 77.8"	7,822 lbs	7,822 lbs	200-1450
Kubota	SVL75-2	2,300 lbs	74 hp, Diesel	119.1"	Standard 17.4 gpm	140.8" x 74" x 82.0"	9,039 lbs	9,039 lbs	200-1450
Bobcat	T590	2,100 lbs	66 hp, Diesel	119"	High 26.7 gpm	133" x 68" x 77.8"	7,822 lbs	7,822 lbs	200-1452
Kubota	SVL75-2F	2,300 lbs	74 hp, Diesel	119.1"	High 29.3 gpm	140.8" x 74" x 82.0"	9,039 lbs	9,039 lbs	200-1452
Bobcat	T650	2,570 lbs	74 hp, Diesel	124"	Standard 23 gpm	136.8" x 74" x 81.3"	9,113 lbs	9,440 lbs	200-1460
Bobcat	T740	3,200 lbs	74 hp, Diesel	132"	Standard 23 gpm	141.6" x 80" x 81.3"	10,127 lbs	10,263 lbs	200-1470
Kubota	SVL95-2S	3,200 lbs	96 hp, Diesel	128.5"	Standard 23.1 gpm	154.6" x 80" x 83.3"	11,299 lbs	11,023 lbs	200-1470

COMPACT EXCAVATORS



BOBCAT/E10

- 29" width for ease of access and gate entry
- Zero tail swing for close up work against walls
- Easily transported at only 2,600 lbs



BOBCAT/E26

- Zero tail swing for close up work against walls
- Easily transported at 5,600 lbs
- Dozer blade with float for backfilling work



BOBCAT/E35i

- 7,468 lbs allows towing with F150 size truck
- Zero tail swing for close up work against walls
- Dozer blade with float for backfilling work



KUBOTA/U35

- Switchable controls
- Adjustable aux flow control settings
- 2-speed travel with auto shift



KUBOTA/K008

- Switchable controls
- Variable width undercarriage for small spaces
- 2-speed travel

MAKE	MODEL	LIFT CAPACITY	HORSE POWER	TAIL SWING	MAX DIG DEPTH	MAX DUMP HEIGHT	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Kubota	K008	1,040 lbs	10.3 hp, Diesel	Conventional	5' 8"	6' 8"	108" x 28" x 87"	2,190 lbs	240-1000
Bobcat	E10	527 lbs	10.2 hp, Diesel	Zero	6'	6'	110" x 28" x 87"	2,593 lbs	240-1000
Bobcat	E26	1,999 lbs	24.8 hp, Diesel	Zero	8.5'	9.9'	170.4" x 59.6" x 94.9"	5,666 lbs	240-1300
Bobcat	E35i	2,866 lbs	24.8 hp, Diesel	Zero	10.2'	11'	189.7" x 69" x 95.6"	7,468 lbs	240-1400
Kubota	U35	3,330 lbs	24.8 hp, Diesel	Minimal	9' 9"	11' 1"	187" x 67" x 97"	8,488 lbs	240-1400
Bobcat	E50	6,034 lbs	49.8 hp, Diesel	Conventional	11.6'	12.7'	218" x 77.2" x 99.7"	10,677 lbs	240-1500
Bobcat	E85	9,327 lbs	59.4 hp, Diesel	Minimal	15.5'	16.5'	246" x 91" x 104"	18,960 lbs	240-1710

COMPACT EXCAVATORS

VOLVO



VOLVO/ECR88D

- Reduced tail swing for access to tight job spaces
- Dozer blade with float function for improved leveling control and fuel efficiency.
- Increased productivity and efficiency with enhanced hydraulic system matched to Volvo engine

VOLVO/EW60E

- Versatile wheeled excavator for wide range of jobs and applications
- Top speed up to 18.4 mph and 4WD for optimal on and off-road for mobility
- Ideal machine for road construction and municipal projects

MAKE	MODEL	LIFT CAPACITY	HORSE POWER	TAIL SWING	MAX DIG DEPTH	MAX DUMP HEIGHT	DIMENSIONS (LWH)	WEIGHT	MAX SPEED	CAT-CLASS
Volvo	ECR88D	8,570 lbs	58 hp, Diesel	Minimal	14' 10"	17' 2"	253" x 91" x 107"	19,600 lbs		240-1710
Volvo	EW60E	3,130 lbs	63.4 hp, Diesel	Conventional	10' 10"	14' 7"	231" x 76" x 112"	12,970 lbs	18.6 mph	240-1620

LANDSCAPE TRACTORS

Kubota

KUBOTA/BX25DRB

- Compact light design with HST transmission
- 540 PTO standard
- 4WD



MAKE	MODEL	TRANSMISSION	ENGINE	DIG DEPTH	OPERATING WEIGHT	LIFT CAPACITY	DIMENSIONS (LWH)	CAT-CLASS
Kubota	BX25DRB	HST Transmission 2WD/4WD	23.0 hp, Diesel	6' 1"	OP WGT 1587 lbs	518 lbs	87.2" x 44.5" x 95.5"	210-1100
Kubota	L330IHST	HST Transmission 2WD/4WD	31.0 hp, Diesel	6' 1"	2,778 lbs	1985 lbs	108" x 55" x 92"	275-1160

ATTACHMENTS



AUGER

Greater torque breaks down rock, tree roots, and frozen ground.



ANGLE BROOM

Quick removal jobs without damaging pavement.



SWEeper PICK-UP BROOM

Similar to a broom and dust pan, scoop, collect, and dump debris with one attachment.



SNOW PUSHER

Free-floating blade contours with ground and collects more snow.



TRENCHER

Side-shift feature allows closer trenching to buildings.



POWER RAKE

Smooth soil and collect debris as small as 1/2 inch.



Available with High Flow Hydraulics

ROTARY CUTTER

Cuts brush and mulches small branches up to 3" in diameter. High flow models can provide more torque for the challenging jobs.



Available with High Flow Hydraulics

PLANER

Less expensive to maintain and more maneuverable than dedicated planer. Increase performance and efficiency with a high-flow planer.



FORKS

Quick connect forks from the operator's seat and reduce the need to exit cab.



GRAPPLE

Delivers easy handling of hard-to-manage materials.



BREAKER

FULL KENT BREAKER LIST **PG 86**

Mono-block design with only two moving parts reduces maintenance and extends up-time.

MAKE	MODEL	TYPE	EQUIPMENT	CAT-CLASS
McMillen	24861	2" Hex Auger Drive	Mini Skidsteer	290-1000
Bobcat	6809442-15C	Auger	Skidsteer-Compact Track Loader-Compact Excavator	290-2000
Bobcat	6905805	68" Angle Broom	Skidsteer-Compact Track Loader	290-2010
Bobcat	6707144	60" Sweeper Pick-up Broom	Skidsteer-Compact Track Loader	290-2015
Bobcat	7113767	94" Snow Pusher	Skidsteer-Compact Track Loader	290-2020
Bobcat	7168340	68" Grapple	Skidsteer-Compact Track Loader	290-2510
Bradco	117765	48" Trencher	Skidsteer-Compact Track Loader	290-2030
Bobcat	6710630	72" Power Rake	Skidsteer-Compact Track Loader	290-2050
Bradco	30372A-0022	72" Standard Flow Rotary Cutter	Skidsteer-Compact Track Loader	290-2060
Bobcat	7233002	72" High Flow Rotary Cutter	Skidsteer-Compact Track Loader	290-2063
Bobcat	M7019	14" Standard Flow Planer	Skidsteer-Compact Track Loader	290-2070
Bobcat	M7017	24" High Flow Planer	Skidsteer-Compact Track Loader	290-2075
Bobcat	6540182	48" Forks	Skidsteer-Compact Track Loader	290-2145
FRD	FX45ACP-QA	550 lb Breaker	Skidsteer-Mini Ex-Rubber Tire Backhoe	290-2230
McMillen	122712-x1975	2" Hex Auger Drive	Mini Excavator	290-5000

HYDRAULIC BREAKERS



KENT/FX25A BREAKER

- 275 ft lbs, efficient for concrete, driveways and sidewalks
- Ideal for tight areas where increased power is needed
- For dingo, skidsteer, and compact excavators



KENT/FX45A BREAKER

- 550 ft lbs, for foundation removal, road repair, site prep
- Faster hitting with larger tool diameter for efficiency
- For skidsteer, compact track loader and mini excavator



KENT/F9 BREAKER

- 1500 ft lbs, for rock and concrete use
- Increased breaking energy produces faster results
- For mini excavators and backhoes



KENT/FX125 QTV BREAKER

- 2000 ft lbs, great for demolition, site prep, roads and bridges
- Fully-enclosed housing reduces noise
- For 14-22 ton excavators

MAKE	MODEL	FT POUND CLASS	HYDRAULIC FLOW (GPM)	BLOWS PER MINUTE	DIMENSIONS (LWH)	WEIGHT	CAT-CLASS
Kent	Fx25a FB-Dingo	275 ft lbs	4.75 - 9.25	600 - 1500	47" x 24" x 12"	273 lbs	290-1025
Kent	Fx25a FSP	275 ft lbs	4.75 - 9.25	600 - 1500	47" x 24" x 12"	273 lbs	290-5150
Kent	Fx25a FB-SS	275 ft lbs	4.75 - 9.25	600 - 1500	47" x 24" x 12"	273 lbs	290-2210
Kent	Fx45a SS	550 ft lbs	7.90- 15.80	600 - 1100	57" x 46" x 24"	840 lbs	290-2225
Kent	Fx45a CP	550 ft lbs	7.90- 15.81	600 - 1100	57" x 46" x 14"	435 lbs	290-5160
Kent	Fx45a CP-QA	550 ft lbs	7.90 - 15.9	600 - 1100	59" x 46" x 24"	790 lbs	290-2230
Kent	F9 FSP	1,500 ft lbs	17.00 - 30.00	550 - 900	76" x 18" x 20"	1,121 lbs	290-6700
Kent	Fx125 Qtv	2,000 ft lbs	18.50 - 31.50	400 - 650	92" x 21" x 24"	1,820 lbs	290-6705

CARRIER COMPATIBILITY GUIDE



CAT-CLASS	MODEL	FT POUND	COMPACT LOADER	SKIDSTEER/ COMPACT TRACK LOADER	MINI-EX/ COMPACT WHEELED EXCAVATOR	BACKHOE	EXCAVATOR
290-1025	Fx25a FB DINGO	275	✓				
290-5150	Fx25a FSP	275			✓		
290-2210	Fx25aFB SSL	275		✓			
290-5160	Fx45a CP	550			✓		
290-2230	Fx45a CP-QA	550		✓	✓		
290-2225	Fx45a SS	550		✓			
290-6700	F9 FSP	1500			✓	✓	✓
290-6705	Fx125 Qtv	2000					✓



DEMOLITION ROBOTS



HUSQVARNA/DXR 140


- Bluetooth remote control
- 100% electric over hydraulic operation
- Superb power-to-weight ratio



HUSQVARNA/DXR 300

- Superb power-to-weight ratio
- Fits through all normal doorways
- 360-degree rotatable arm

MAKE	MODEL	POWER TYPE	GENERATOR REQUIRED	SHORE POWER REQUIRED	REACH	WEIGHT	DIMENSIONS (LWH)	CAT-CLASS
Husqvarna	DXR 140	Electric 480v 3ph	45" kW (56 KVA), 480v 3ph	480v 3ph 40 AMPS	14' (UP) 12' (Forward)	2132 lbs	76" x 30" x 48" (Down) 76" x 30" x 55" (Up)	230-1000
Husqvarna	DXR 300	Electric 480v 3ph	45" kW (56 KVA), 480v 3ph	480v 3ph 40 AMPS	17' (UP) 16' (Forward)	4321 lbs	111" x 31" x 54" (Down) 111" x 31" x 61" (Up)	230-1100

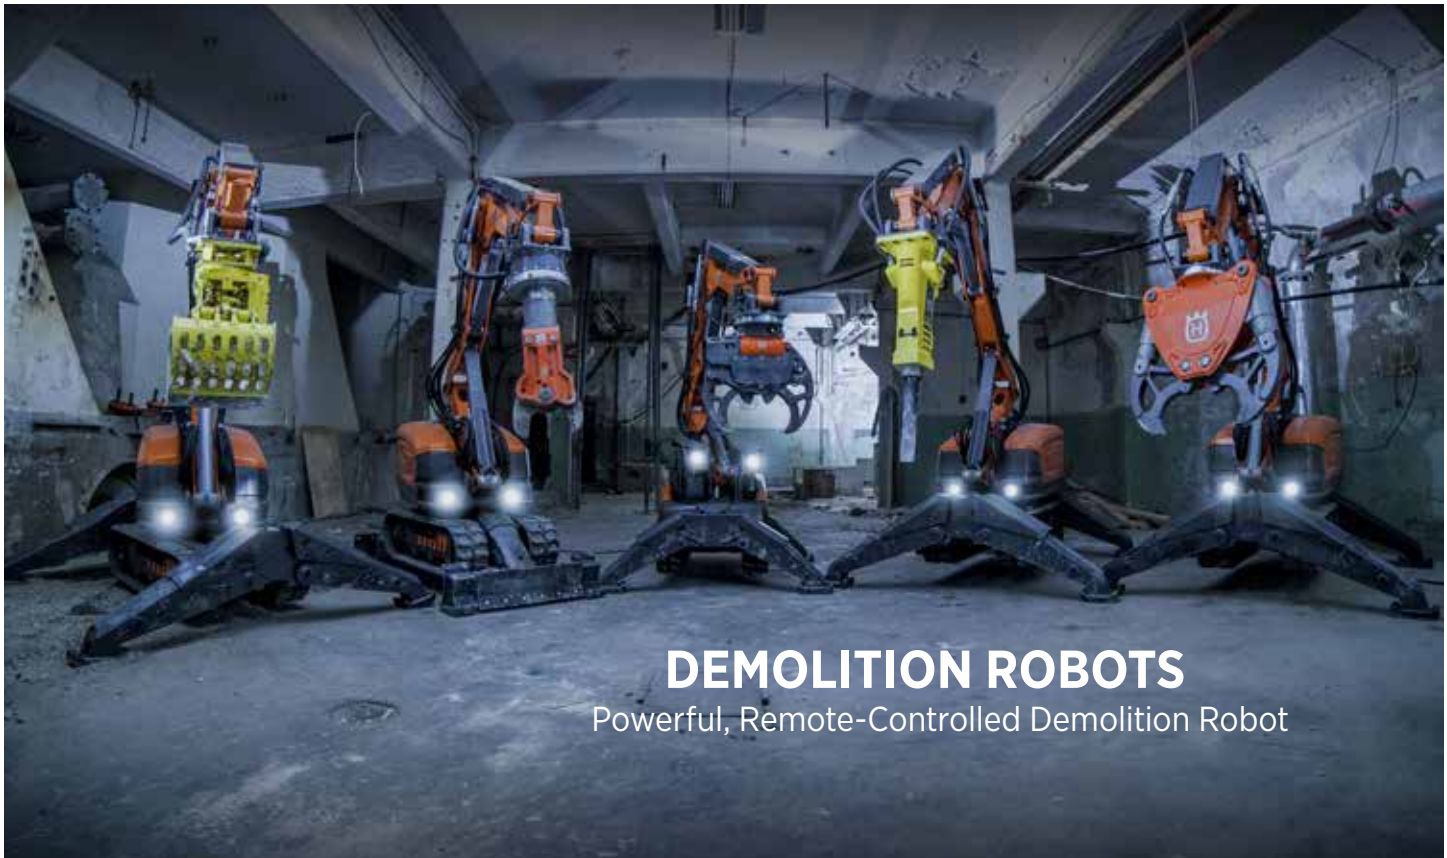

DEMOLITION ROBOTS
Powerful, Remote-Controlled Demolition Robot

ATTACHMENTS



BREAKER



BUCKET



CRUSHER



GRAPPLE



STEEL SHEAR

MODEL / TYPE	ATTACH TO	WEIGHT	DIMENSIONS	CAT-CLASS
SB 152 / Breaker	DXR 140	326 lbs	31" x 14" x 12"	230-1200
SB 202 / Breaker	DXR 300	441 lbs	31" x 16" x 14"	230-1210
SB 302 / Breaker	DXR 300	659 lbs	31" x 18" x 16"	230-1210
MG 100 / Grapple	DXR 140	220 lbs	31" x 18" x 22"	230-1300
MG 200 / Grapple	DXR 300	373 lbs	31" x 18" x 24"	230-1310
DCR 140 / Crusher	DXR 140	250 lbs	31" x 28.75" x 13"	230-1400
DCR 300 / Crusher	DXR 300	390 lbs	31" x 34.5" x 13"	230-1410
DSS 200 / Shear	DXR 140/300	408 lbs	31" x 13" x 17.1"	230-1500
DXR 140 / 12" Clean Out Bucket	DXR 140	110 lbs	31" x 12" x 20"	230-1600
DXR 300 / 12" Clean Out Bucket	DXR 300	110 lbs	31" x 12" x 20"	230-1610
DXR 140 / 20" Standard Digging Bucket	DXR 140	150 lbs	31" x 20" x 20"	230-1620
DXR 300 / 20" Standard Digging Bucket	DXR 300	150 lbs	31" x 20" x 20"	230-1630
DXR 140 / 30" Clean Out Bucket	DXR 140	180 lbs	31" x 30" x 20"	230-1640
DXR 300 / 30" Clean Out Bucket	DXR 300	180 lbs	31" x 30" x 20"	230-1650